

ATC 800 H Series NPO Ceramic High RF Power Multilayer Capacitors

- Case H Size (.720" x .740")
- High Q
- Ultra Low ESR
- High RF Power
- 8000 WVDC
- Capacitance Range: 100 pF to 20,000 pF
- Ultra-Stable Performance
- High RF Current/Voltage
- High Reliability
- RoHS Compliant, Pb free

ATC's 800 H Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance ensure that the 800 H Series products are your best choice for high RF power and High CV applications.

Typical functional applications: Bypass, Coupling, Tuning, Impedance Matching and DC Blocking

Typical circuit applications: HF/RF Power Amplifiers, Transmitters, Antenna Tuning, Plasma Chambers, Induction Charging Systems, Medical (MRI coils) and Inductive Heating.

ENVIRONMENTAL TESTS

ATC 800 H Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

MOISTURE RESISTANCE:


MIL-STD-202, Method 106

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C at rated voltage.

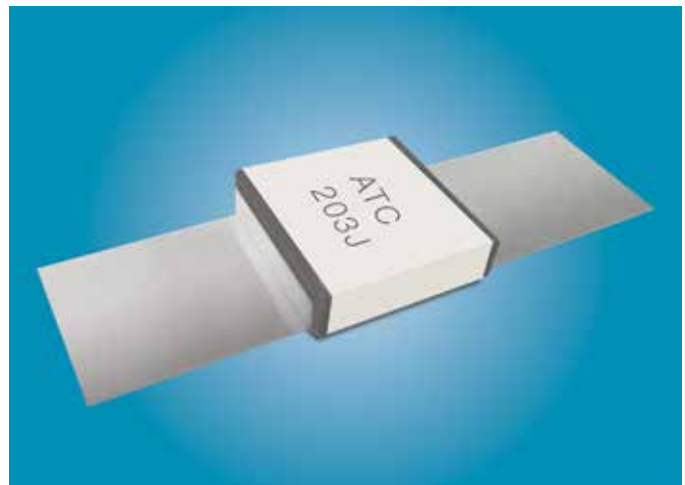

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 5000 (100 pF to 1000 pF) @ 1 MHz.
Greater than 5000 (1100 pF to 20,000 pF) @ 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

10⁵ Megohms min. @ +25°C at 500 VDC
10⁴ Megohms min. @ +125°C at 500 VDC
Max. test voltage is 500 VDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

120% of WVDC for 5 seconds..

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure)

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C

TERMINATION STYLE:

See Mechanical Configurations, page 2

TERMINAL STRENGTH: Terminations for chips withstand a pull of 12 lbs. min., 20 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
sales@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



THE ENGINEERS' CHOICE®

www.atceramics.com


ATC # 001-1144 Rev. H, 5/18

ATC 800 H Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
101	100	G, J, K	8000	561	560	G, J, K	5000	332	3300	G, J, K	3000
111	110			621	620			392	3900		
121	120			681	680			472	4700		
131	130			751	750			512	5100		
151	150			821	820			562	5600		
161	160			911	910			622	6200		
181	180			102	1000			682	6800		
201	200			112	1100			752	7500		
221	220			122	1200			822	8200		
241	240			132	1300			912	9100		
271	270		152	1500	103		10000				
301	300		162	1600	113		11000				
331	330		182	1800	123		12000				
361	360		202	2000	133		13000				
391	390		222	2200	153		15000				
431	430		242	2400	163		16000				
471	470		272	2700	183		18000				
511	510		302	3000	203		20000				

SPECIAL VALUES, TOLERANCES AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.



ATC PART NUMBER CODE

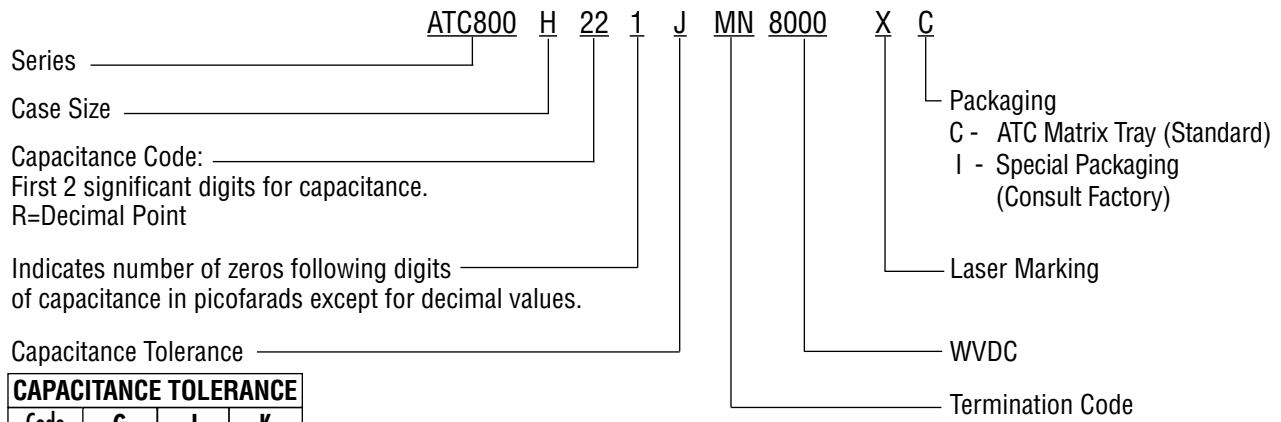

CAPACITANCE TOLERANCE			
Code	G	J	K
Tol.	±2%	±5%	±10%

The above part number refers to a 800 H Series (case size H) 220 pF capacitor, J tolerance (±5%), 8000 WVDC, with MN Non-Magnetic termination (Microstrip Termination), laser marking and plastic Matrix Tray packaging.

ATC 800 H Non-Magnetic Capacitors: Mechanical Configurations

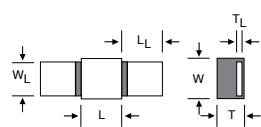ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPECASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
800 H	MN	 Microstrip		.735 +.060 -.010 (18.67 +1.524 -.254)	.750 +.020 -.010 (19.05 +.508 -.254)	.220 (5.59) max.	N/A.	High Purity Silver Leads L _L = .750 (19.05) min. W _L = .660 ±.010 (16.764 ±.254) T _L = .010 ±.001 (.254 ±.025) Leads are Attached with High Temperature Solder

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

ATC accepts orders for our parts using designations with or without the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.
Consult factory for additional performance data.



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 800 H Performance Data

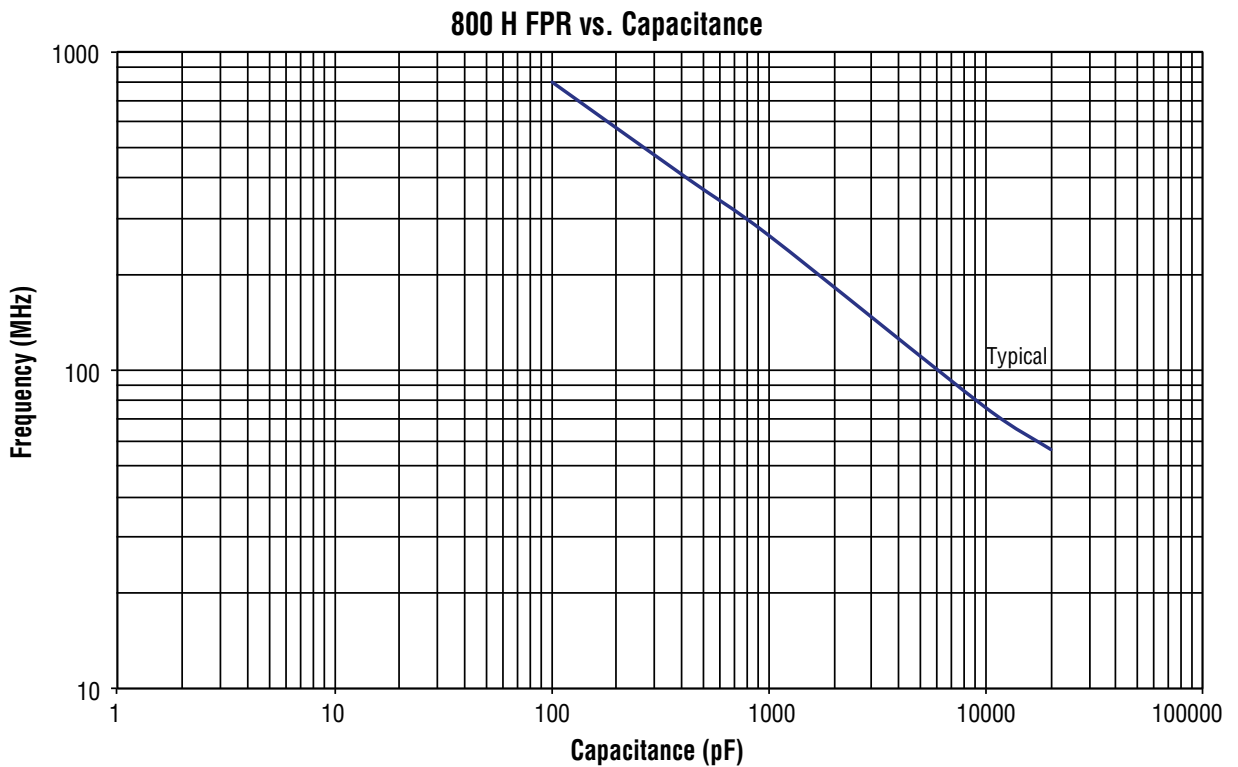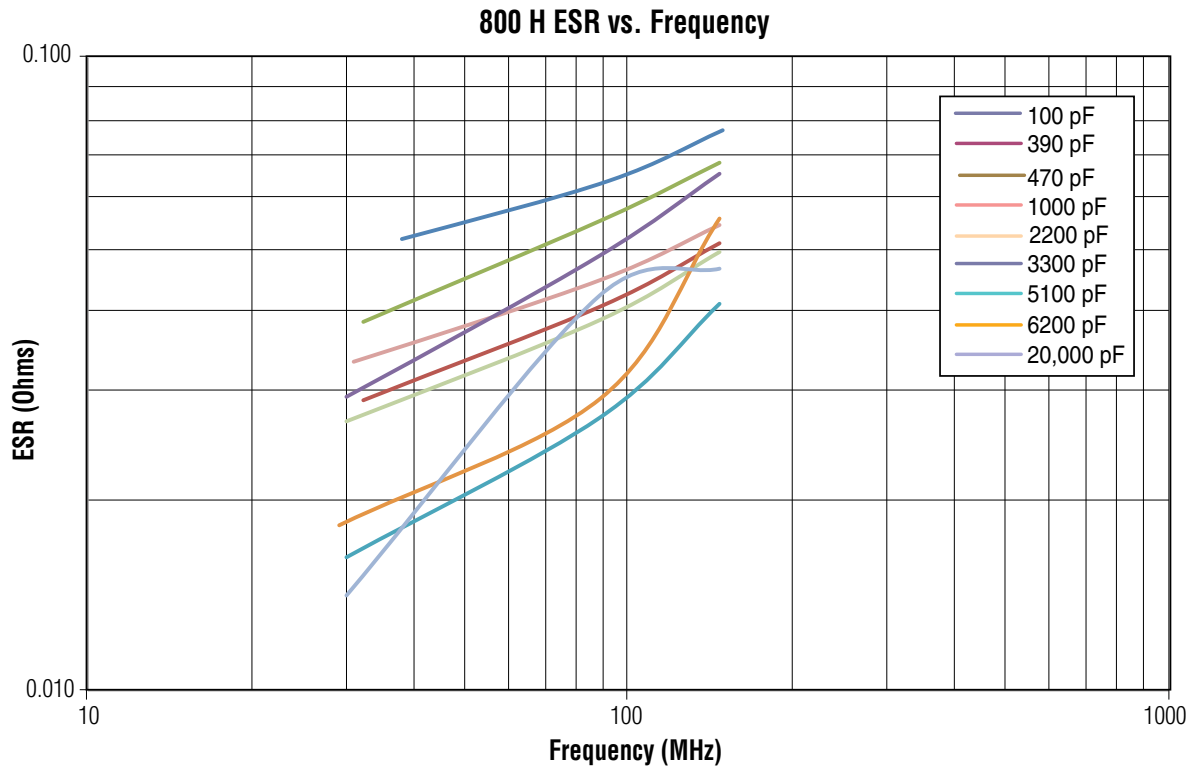

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 800 H Performance Data

800 H Current vs Capacitance

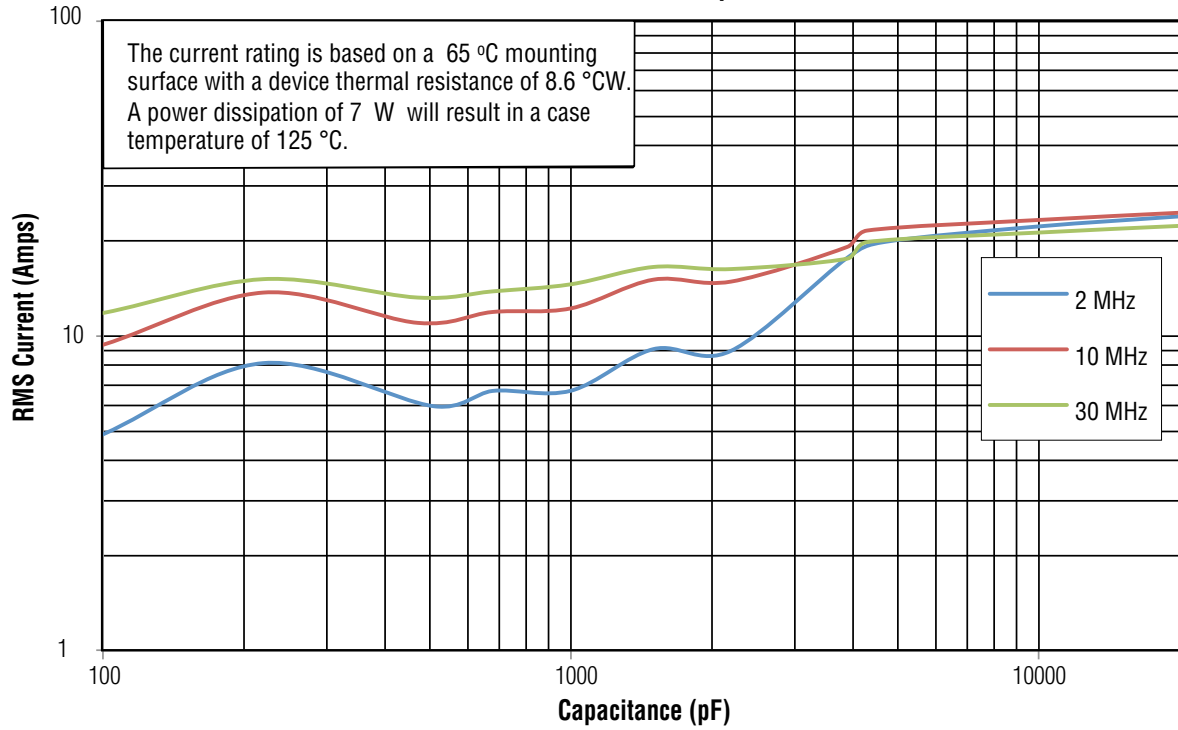

800 H Capacitance Change vs. Temperature

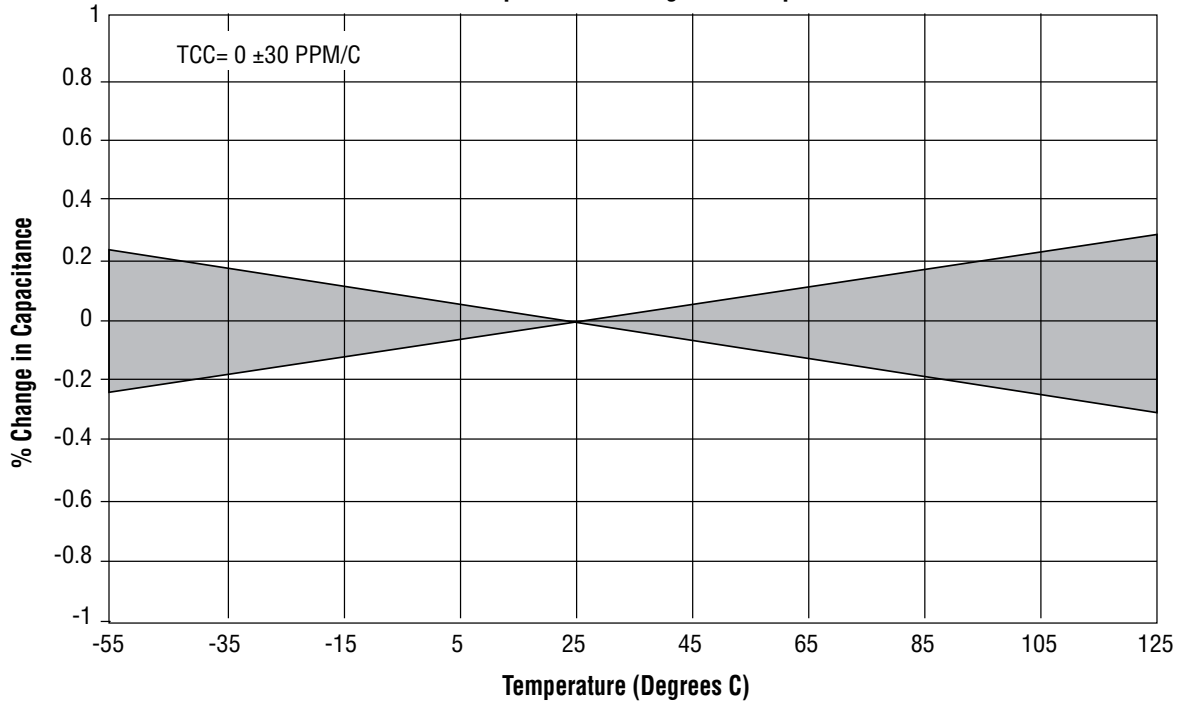

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2015 American Technical Ceramics Corp. All Rights Reserved

ATC # 001-1144 Rev. H, 5/18

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com