

## ATC WBR Series Wire Bond Resistors (Top Contact/Bottom Isolated)

### Features:

- Resistance Range: 5  $\Omega$  to 1 M $\Omega$ \*
- Outline Size: 20 x 20 mils (0.51 x 0.51 mm)
- Passivated SiCr or TaN Resistor Material
- Gold Wire Bondable\*\*
- Ultra-High Stability
- Extremely Low TCR available ( $\pm 25$  ppm/ $^{\circ}$ C)
- Laser Trim for Tight Tolerances
- Top Contact / Bottom Isolated
- Unique A-Face Value Marking
- Ideal for Hybrid Circuit Applications

*Please contact factory for the following:*

*\*Custom designs up to 10 M $\Omega$  are available*

*\*\*Aluminum bond pads are available*



American Technical Ceramics offers the WBR Series precision Wire Bondable Resistors. These resistors are designed specifically for applications that require stable thermo-compression, ultrasonic or epoxy die attachment. This device is built in an 0202 chip outline and is ideal for but not limited to hybrid circuit applications.

The WBR Series utilizes our proprietary thin film resistor material sets. This results in extremely tight tolerances and superior Temperature Coefficient of Resistance (TCR). Tolerance of  $\pm 0.1\%$ , with absolute TCR of  $\pm 25$  ppm/ $^{\circ}$ C is available. The WBR offers excellent stability and reliability and is suitable for the most demanding applications.



### Applications:

- Hybrid Chip on Board Circuits
- Multi Chip Module (MCM)
- Bias Networks
- Test and Measurement Equipment
- Aerospace
- Medical
- Automotive

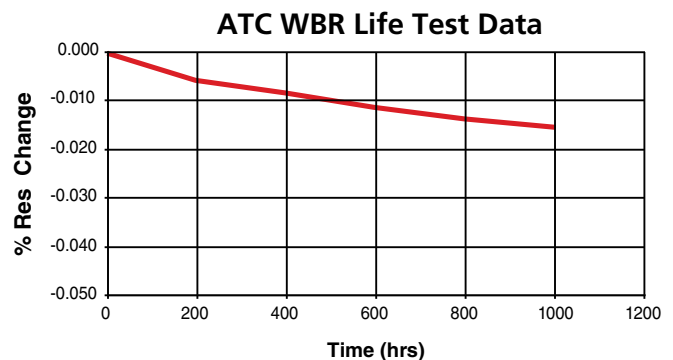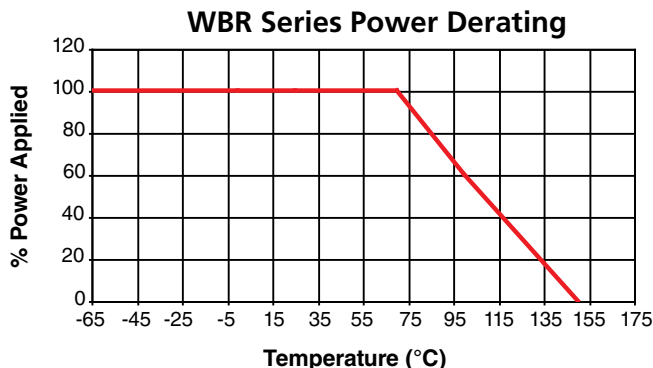

**AMERICAN TECHNICAL CERAMICS**

ATC // AVX Thin Film Technologies

tfsales@atceramics.com

ATC North America

sales@atceramics.com

**THE ENGINEERS' CHOICE®**

**www.atceramics.com**

**THE ENGINEERS' CHOICE®**

ISO 9001 REGISTERED COMPANY

ATC # 001-1109


Rev C, 6/17

# ATC WIRE BONDABLE RESISTIVE PRODUCTS

## Resistor Materials

Substrate Material	Oxidized Silicon
Resistor Material	Silicon Chrome (SiCr)
Backing	None, Lapped Silicon
Bonding Pad Material	Gold

## Outline Dimensions

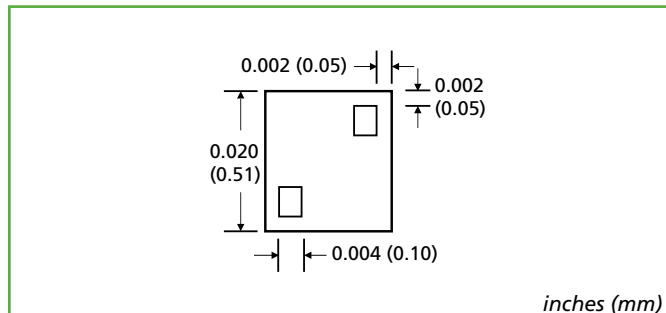

## Mechanical Configurations

Size	Length (L)	Width (W)	Thickness (T)	Bond Pad
0202	.020 ±.004 (0.51 ±0.10)	.020 ±.004 (0.51 ±0.10)	.010 ±.002 (0.25 ±0.05)	.0038 x .0038 (0.09 x 0.09)

## General Specifications

Resistor	Detail
Package Outline	0202
Resistance Range	5 Ω to 1 MΩ *
Power Rating	250 mW (70°C, derated to 0 at 150°C) on alumina
Termination	Gold Wire Bond
Tolerances	0.1, 0.5, 1%
Operating Temperature	-55°C +125°C
Temperature Coefficient of Resistance	±25, ±50, ±100 ppm/°C
Maximum Rated Voltage	125 volts
Insulation Resistance	10 <sup>6</sup> MΩ

\*Custom Designs up to 10 MΩ available

## Environmental Tests

Test	Limit	Condition
Life Test	±0.25% max	1000 hrs., 125°C @ 50 mW
Thermal Shock	±0.25% max.	IAW MIL-STD-202, condition B
High Temperature Exposure	±0.25% max.	100 hrs. @ 150°C
Moisture Resistance	±0.25% max.	IAW MIL-PRF-55342
Wire Bond Test	4 grams min. (1.25 mil wire)	IAW MIL-PRF-55342
Short-Time Overload	±0.25% max.	IAW MIL-PRF-55342

## ATC Part Number Code

ATC WBR	1	470	1	F	G	E	W													
Name								Packaging: Waffle Pack, 400 pc. qty.												
Type								Temperature Coefficient of Resistance (TCR - ppm/°C) C = ±25, D = ±50, E = ±100 (Std.)												
Resistance Value (Ω)								Termination G = Gold Wire Bond												
Multiplier								Tolerance												
The above part number refers to an ATC WBR1 (0202), 4700 Ohms, F tolerance (1%), Gold Wire Bond Terminations, TCR of 100 ppm/°C, Waffle Pack Packaging								<table border="1"> <thead> <tr> <th colspan="4">RESISTOR TOLERANCE</th> </tr> <tr> <th>Code</th> <th>B</th> <th>D</th> <th>F</th> </tr> </thead> <tbody> <tr> <td>Tol.</td> <td>±0.1%</td> <td>±0.5%</td> <td>±1%</td> </tr> </tbody> </table>	RESISTOR TOLERANCE				Code	B	D	F	Tol.	±0.1%	±0.5%	±1%
RESISTOR TOLERANCE																				
Code	B	D	F																	
Tol.	±0.1%	±0.5%	±1%																	

ATC accepts orders for our parts using designations with or without the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at +1-631-622-4700.

Consult factory for additional performance data.

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 2012 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1109; Rev C, 6/17



AMERICAN TECHNICAL CERAMICS

ATC // AVX Thin Film Technologies

ATC North America

tfsales@atceramics.com

sales@atceramics.com

THE ENGINEERS' CHOICE®

[www.atceramics.com](http://www.atceramics.com)

